

Unpacking an Acrobat 19 & 22 LCD:

1. Open top of the box



2. Remove top foam padding



3. Lift and carefully remove the carrying case, which contains the Acrobat CCTV, from the box, and place it flat on a table.



4. Unzip the carrying case, and gently slide the CCTV out of the case along with the foam padding.







5. Place the monitor upright, and start to remove the foam padding.






6. Remove the camera (in the pink bag) embedded into the foam padding



7. Connect the camera into the arm, and plug in the Ethernet cable into the camera as well.

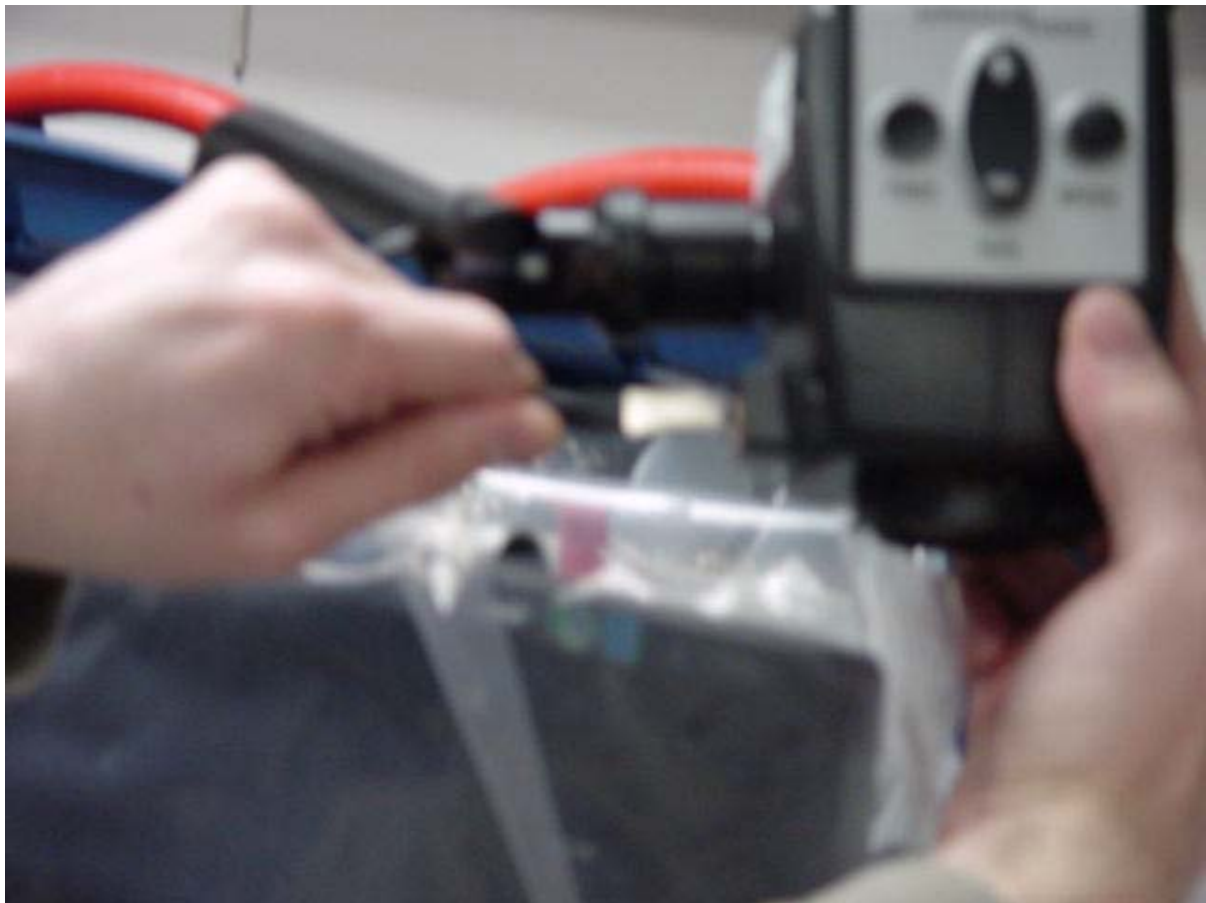



8. Plug in the monitor into a socket.

